


Section B-B

SECTION NOTES (TYP)

1. ALL RAIL CONNECTIONS SHALL BE MADE USING $\frac{5}{8}$ DIA A307 MACHINE BOLTS GALV. TYPICAL
2. ALL RAILS ARE MADE FROM $1\frac{1}{2}$ DIA STANDARD PIPE TYPICAL, MAX POST SPACING = 8'-0"
3. ALL LADDER CONNECTIONS TO STRUCTURE SHALL BE MADE USING $\frac{3}{4}$ DIA A325 BOLTS GALV. TYPICAL UNO

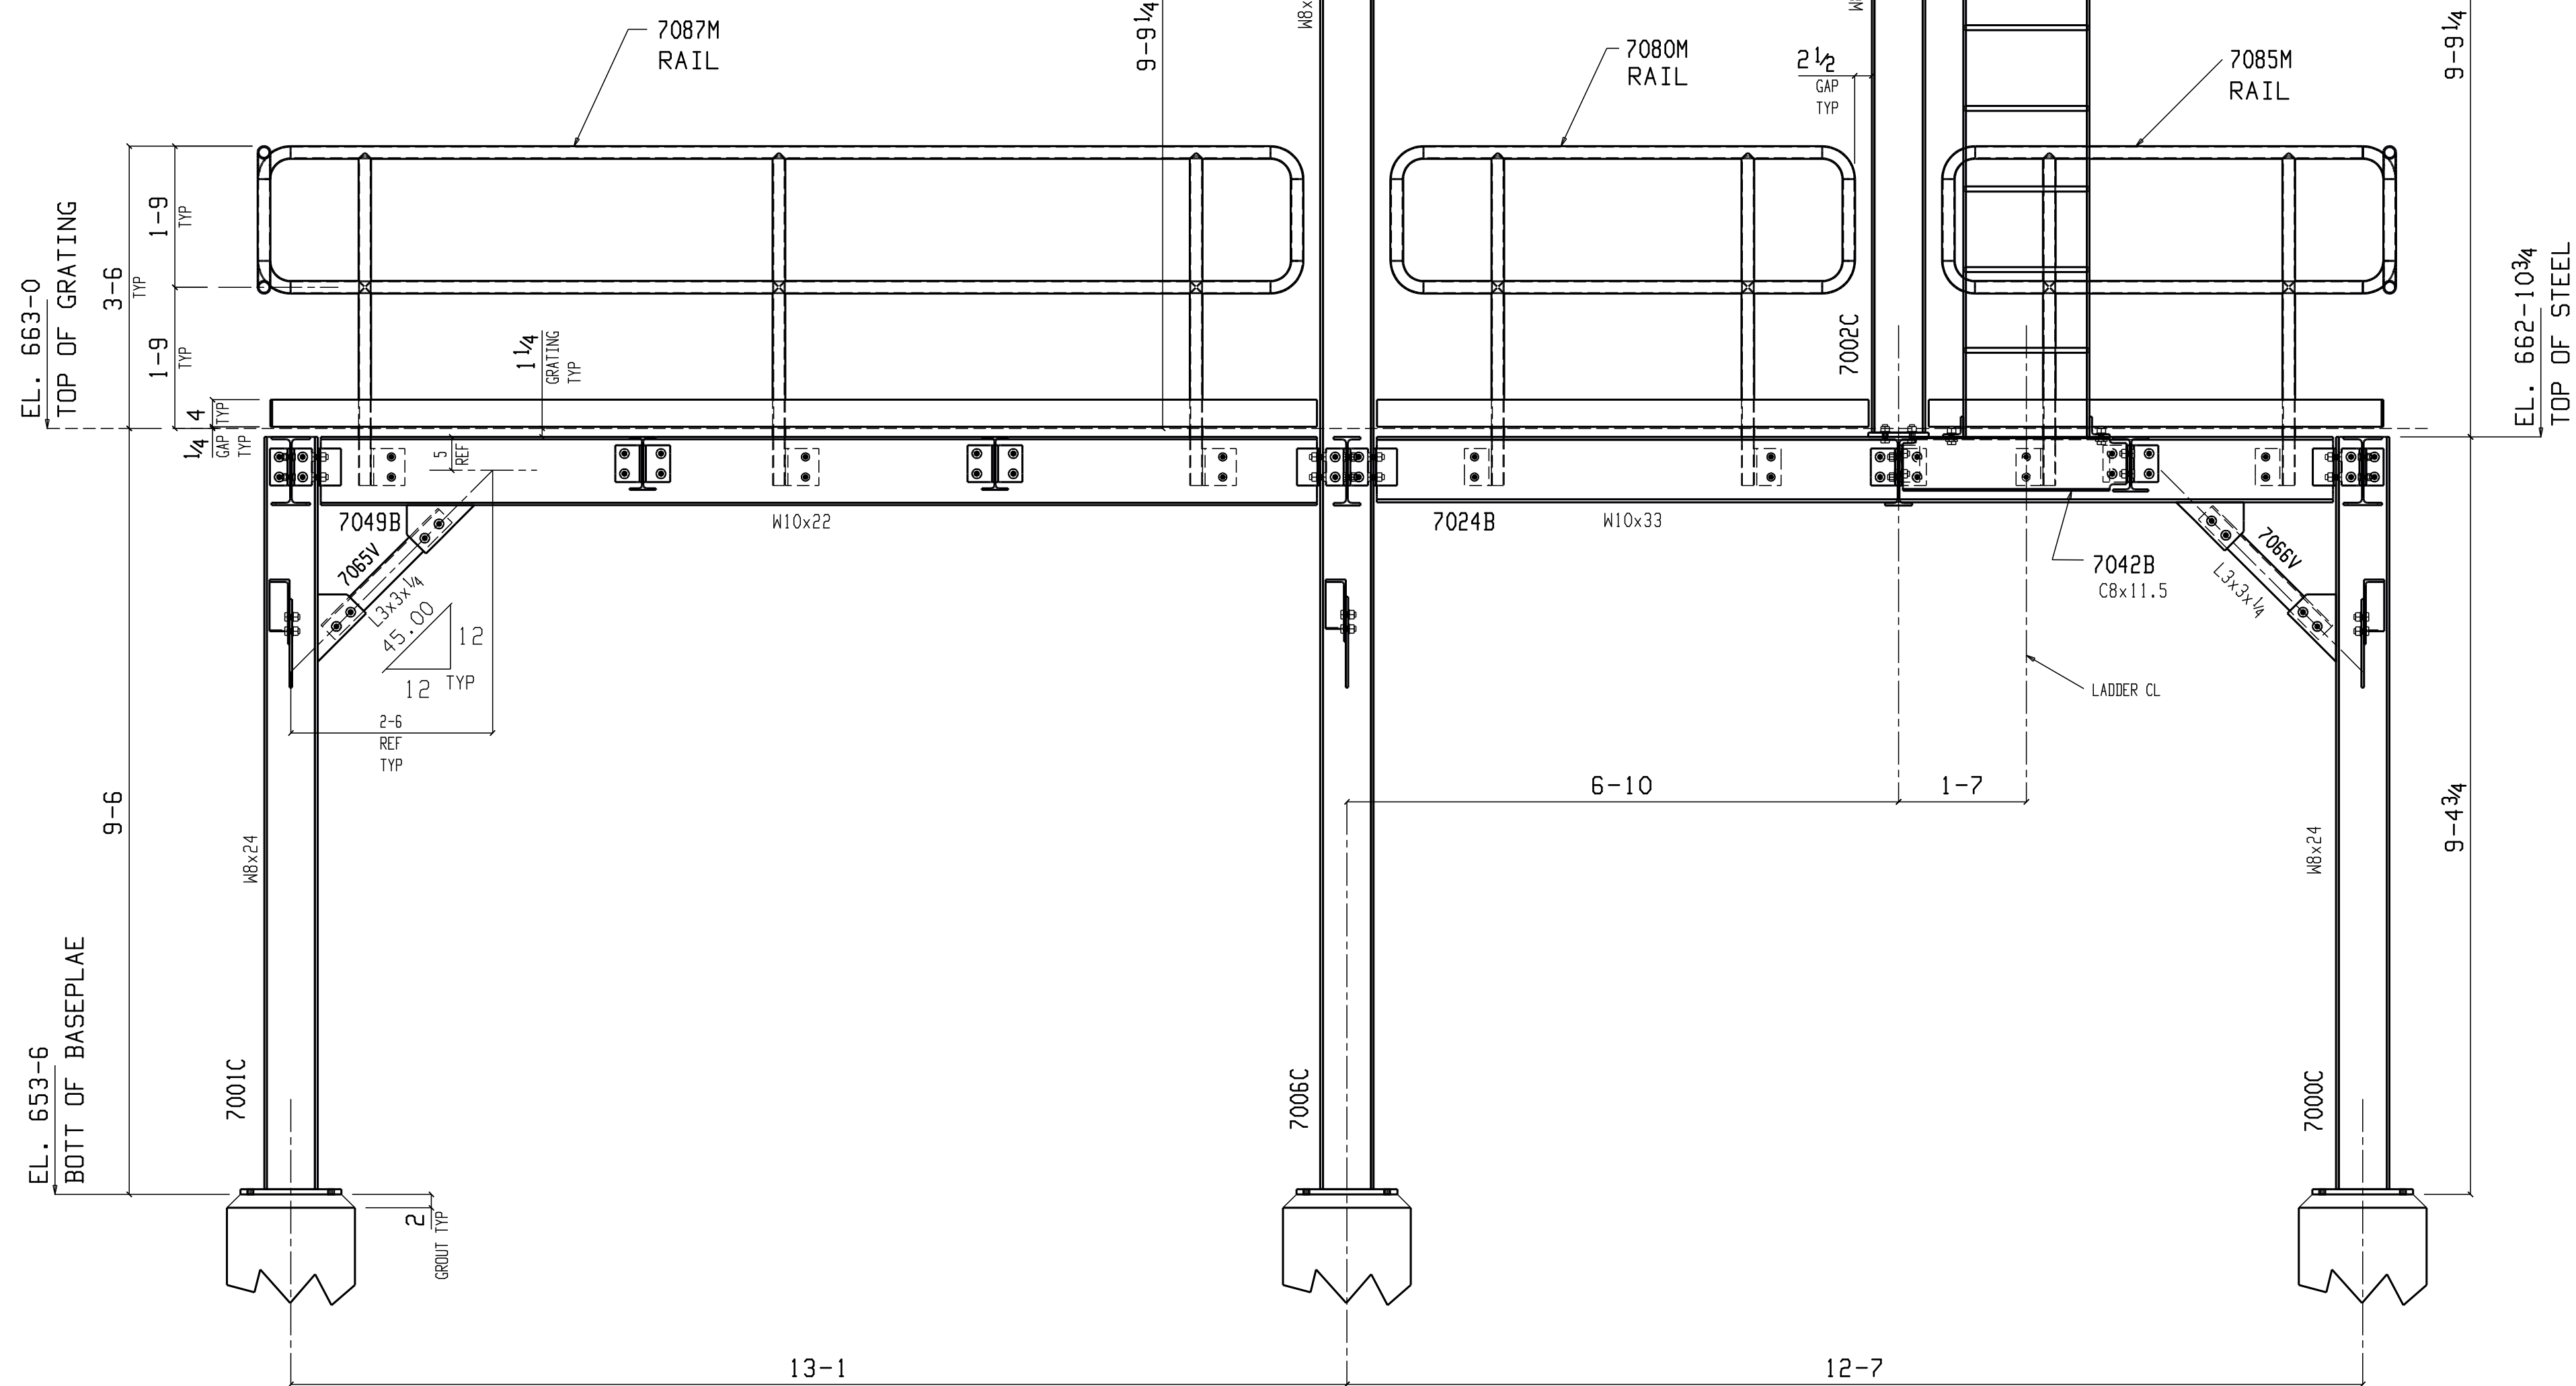

Section D-D

Shop Drawings Produced by:
ABACUS DETAILING & DESIGN
 Steel Detailing is our Specialty
 (360) 298-7745

RELEASED FOR CONSTRUCTION

0	04-23	RELEASED FOR CONSTRUCTION		04-23	04-23
A	04-08	RELEASED FOR APPROVAL		04-08	
REV.	DATE	DESCRIPTION	APP.	SHOP	FIELD
MW MERCHANT IRON WORKS <small>COLUMBIA OFFICE 211 VETERANS RD COLUMBIA, SC 29208 803-695-2870</small> <small>SUMTER OFFICE 3215 BELLAM CUTTING RD SUMTER, SC 29154 803-481-9931</small>					
JOB: ALEVO MIXING TANK & EQUIPMENT ROOF TOP PLATFORMS					
LOCATION: CONCORD, NORTH CAROLINA CUSTOMER: -					
ARCHITECT: PERIGON					
DETAILER: DCB DRWG. COVERS: STEEL ELEVATIONS CHECKER: JS	DATE: 04-2015 DATE: 04-2015	JOB NO. 1396		DRWG. NO. E-7001	